

18-2 Solid Shielded Power Cable



RP7500094P



Description

- 18 AWG 2 Conductor Bare Copper Shielded Plenum
- UL Listed C(UL) US CMP or FPLP (UL)

Part #: RP7500094P - 1000' Roll

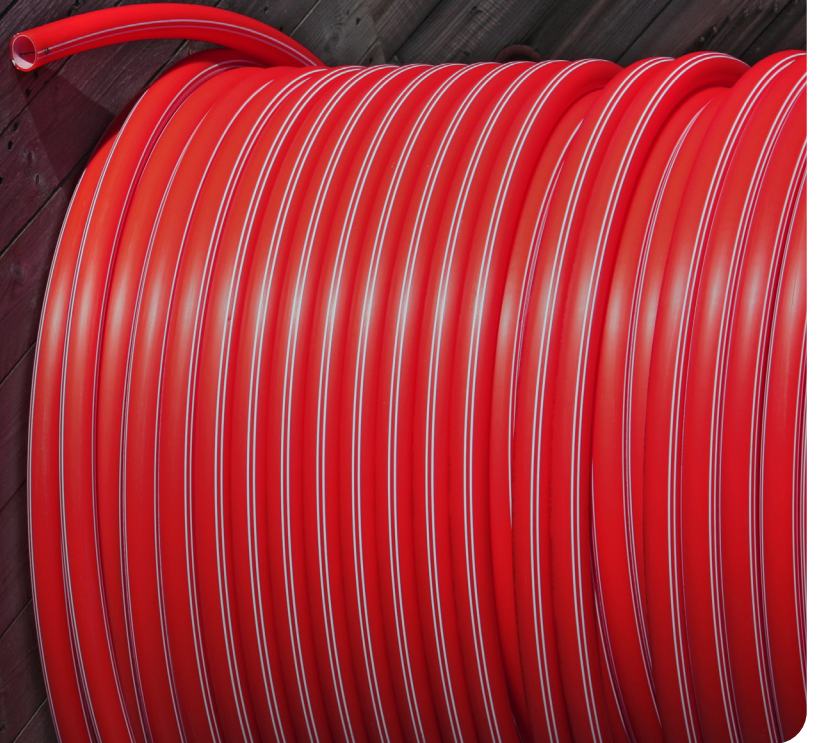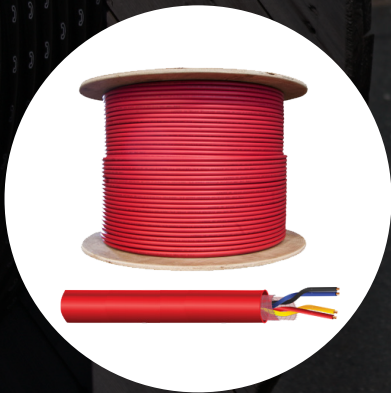

Specifications:

Conductor: 18 (7/26 Bare Copper)
Insulation: Low-Smoke PVC 0.008"
Color Code: Red/Black
Shield: Aluminum Mylar
Jacket: Low Smoke PVC 0.018"
Jacket Color: Red
Overall Diameter: 0.158" Nom.
Cable Weight: 22 lbs.
Capacitance: 68 pF/Ft. Nom.
Impedance: 28 Ohms/Mft.

Temperature Rating: 0° C to 75° C/ 300 Volt
Flame Rating: Approved for plenum use without conduit per NFPA 262 Flame Test
Agency Approvals: NEC Article 800, 760; UL Listed, C(UL) US CMP OR FPLP (UL), RoHS Compliant, Made in the USA
Warranty: 2 years