



Part #: 2400-807RAS
Dimensions: 5-3/8" H x 4-1/2" W x 2" D

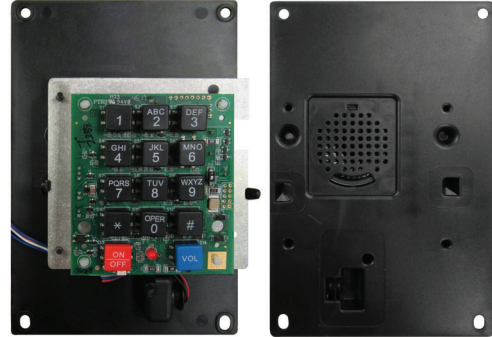

Part #: 2400-807RA
Dimensions: 8-1/8" H x 5-1/8" W x 2" D

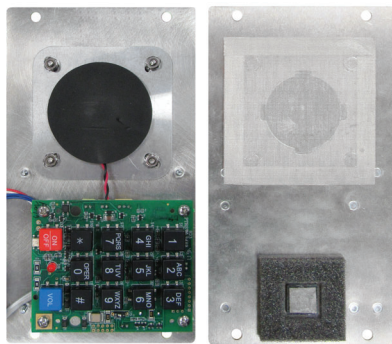

Part #: 2400-807CC
Dimensions: 8-1/3" H x 4-1/2" W x 2" D

Contact Us
For Direct
Mount
Competitor
Plates

Code Compliance:

- Meets all ADA, ASME A17, and B44 codes for elevator emergency phones

Power Requirements:

- Requires analog telephone line either POTS, PBX, or central office phone line with a standard WINK signal
- Designed to be powered off telephone line power
- Requires 48v @ 25mA

Programming Features:

- On-site programming
- Programmable with up to 2 emergency numbers
- Recordable location message (25 seconds)
- Numeric programming keypad

Phone Capabilities:

- Automatic dialer (31 digit programmable memory)
- Automatic answer feature with audible ring
- Touch Tone operation only (Touch Tone is an AT&T registered trademark)

Additional Features:

- 2vdc, 1/3 watt LED (solid light when dialing, flashes when answered)



Specifications:	
Environmental:	-40 °F - +150 °F
Mounting:	Behind the Panel
Warranty:	2 Years