



Connecting and
protecting people

Installation guide
MK799
Intercom
Module

MU79900MK101-EN

V1



Intercom Module


Guide to be used with products: MK799

The MK799 is a module that provides the intercom function in any rescue telephone installation using a PSTN line and compatible MK equipment (e.g. MK852) without the need to add more cabling than what already exists in the installation.

The MK799 plugs into the existing telephone line and enables communication between the machine room and the cabins of the installation. It also allows the alarm device to be programmed using the Intercom.

Installation

- 1 First, the device must be attached using the adhesive that already comes on the back of the device case.
- 2 Then remove the top cover by pressing lightly on both sides of the cover and pulling it off.
- 3 Connect the telephone line to terminals 1 and 2 (See diagram).
- 4 Connect the telephone line of the booths to terminals 3 and 4 (See diagram).

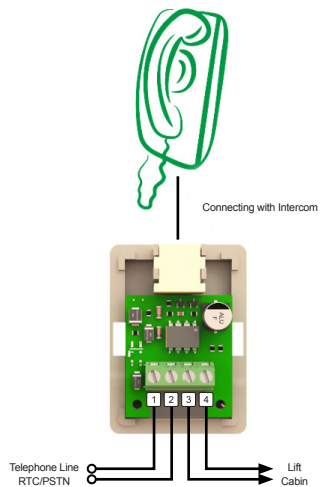

In multi-cabin installations, the MK799 should be installed at the beginning of the distribution of the lines to the cabins.

Voice Communication / Local Programming via intercom

To start the voice communication / local programming process, the following steps must be followed:

- 1 Pick up the intercom. (The dial tone can be heard in the background)
- 2 Enter the connection command with the desired cabin (See table).
- 3 Start talking / programming.
- 4 Finalise the process by entering the hang-up command of the cabin equipment.

Commands	Description
*1#	Communication with cabin 1
*2#	Communication with cabin 2
*3#	Communication with cabin 3
*4#	Communication with cabin 4
*0#	End communication (hang-up)

IMPORTANT!

It is very important that the MK799 is installed at the beginning of the telephone line. All booths that are connected to terminals 1 and 2 will not work.

DECLARATION OF CONFORMITY




Avire declares that this product is in compliance with the essential requirements and other relevant provisions of the following Directives: 2014/30/EU; 2014/33/EU and 2011/65/EU.

ELECTRONIC EQUIPMENT WASTE




The existence of this symbol on the product or on the packaging means that this product cannot be disposed of as domestic waste. It is the responsibility of the user to deliver this product to a Recycling Collection Point or alternatively, it must be returned to Avire for proper recycling management.

 Unit 2, The Switchback
Gardner Road
Maidenhead
Buckinghamshire
SL6 7RJ

 +44 (0)1628 540 100

 01628 621 947

 sales.uk@avire-global.com

 avire-global.com

